

TECHNICAL DATA

Electrical

Impedance	50 Ω
Frequency range	0~ 4 GHz
Voltage Rating	500 Vrms
Insulation resistance	$\geq 5000M\Omega$

Mechanical & Environmental


Durability (matings)	>500
Temperature range	-55 °C ~ +165 °C
RoHS Compliant	Yes

Material & Finish

Body	Brass, Nickel-plated
Pin Contact	Phosphor Bronze, Gold-plated
Insulator	PTFE
Gasket	Silicone Rubber





Interface Standards

BNC	IEC-60169
-----	-----------

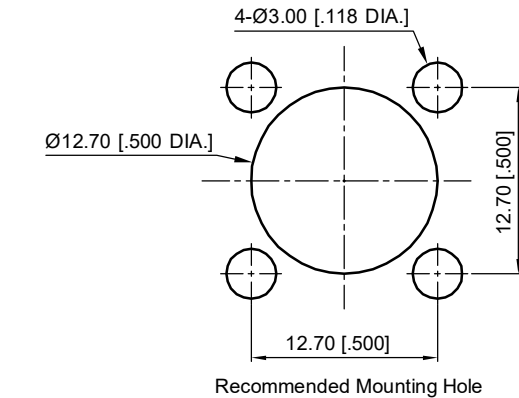

NOTES:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.

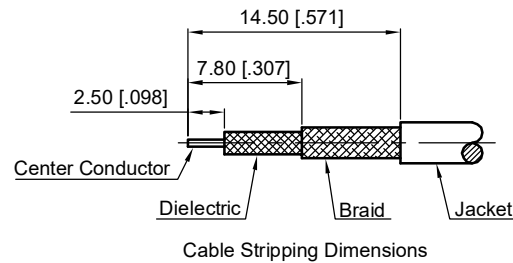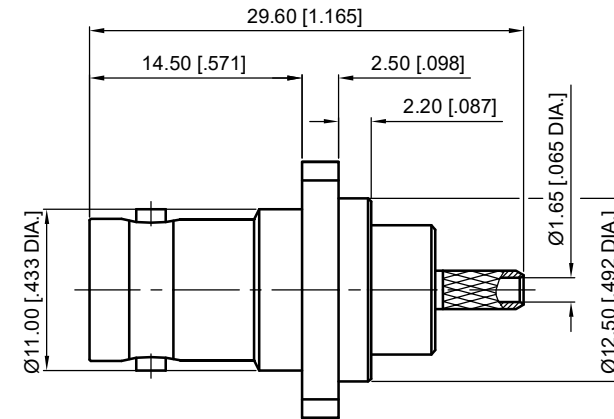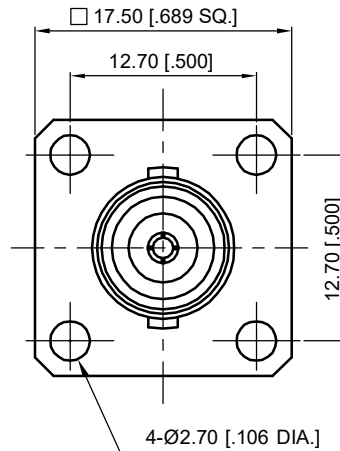

1. CRIMP FERRULE
HEX. CRIMP TOOL SIZE: 3.25 [.128]


UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS [INCHES].
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE:

.XX ± 0.13 [.005"]
.X ± 0.20 [.008"]
X ± 0.50 [.019"]

ANGULAR TOLERANCES ARE: ALL = $\pm 1^\circ$

DO NOT SCALE DRAWING

PROJECTION:



DRAWN:	L. Ma	05/17/2017
CHECKED:	J. Zhu	05/17/2017
APPROVED:	M. Dong	05/17/2017

TITLE:
BNC Straight 4 Hole Flange
Female Clamp for
RG174/RG316/LMR100 Cable

CMPPTER®

Cmppter Electronics Co., Ltd. www.cmppter.com

PART No.:
10-02-4F00-079

SIZE: A4	SCALE: 2:1	SHEET: 1/1	REV: B
-------------	---------------	---------------	-----------