

REVISIONS				
REV	DESCRIPTION OF REVISION	ECN No.	DATE	APPROVED
A	INITIAL RELEASE	—	11/17/2014	M. Dong

TECHNICAL DATA

Electrical

Impedance 50 Ω
 Frequency range 0~3 GHz
 Withstanding voltage 1000 V
 Insulation resistance ≥5000MΩ

Mechanical & Environmental



Durability (matings) >500
 Temperature range -55 °C ~ +165 °C
 RoHS Compliant Yes

Material & Finish

Body Brass, Nickel-plated
 Pin Contact Phosphor Bronze, Gold-plated
 Fastening Nut Brass, Nickel-plated
 Insulator PTFE
 Gasket Silicone Rubber

Interface Standards

BNC IEC-60169

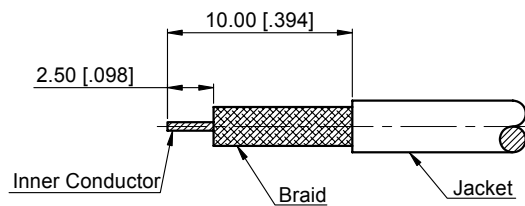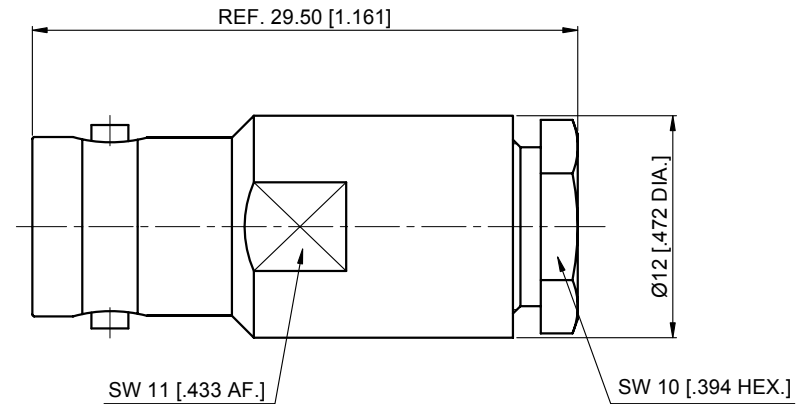

CABLE STRIPPING DIMENSIONS

NOTES:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS [INCHES]. UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] ANGULAR TOLERANCES ARE: ALL±1°	DRAWN: L. Ma 11/17/2014
DO NOT SCALE DRAWING	CHECKED: J. Zhu 11/17/2014
PROJECTION:	APPROVED: M. Dong 11/17/2014

TITLE:	BNC Straight Female Clamp for RG174/RG316/LMR100 Cable
--------	--

Cmptter Electronics Co., Ltd. www.cmptter.com			
PART No.: 10-02-4M00-069			
SIZE: A4	SCALE: 2.5:1	SHEET: 1/1	REV: A