

TECHNICAL DATA

Electrical

Impedance	50 Ω
Frequency range	0~3 GHz
Withstanding voltage	2500 V
Insulation resistance	≥5000MΩ

Mechanical & Environmental

Durability (matings)	>500
Temperature range	-65 °C ~ +165 °C
RoHS Compliant	Yes


Material & Finish

Bodies	Brass, Albaloy-plated
Pin Contact	Phosphor Bronze, Silver-plated
Fastening Nut	Brass, Nickel-plated
Gasket	Silicone Rubber
Insulator	PTFE

Interface Standards

N	IEC-60169
---	-----------

REVISIONS				
REV	DESCRIPTION OF REVISION	ECN No.	DATE	APPROVED
A	INITIAL RELEASE	---	05/09/2007	M. Dong
B	DIMENSIONS CHANGED	---	03/21/2011	M. Dong
C	PART NUMBER CHANGED	---	03/27/2012	M. Dong
D	PART NUMBER CHANGED	---	11/01/2013	M. Dong

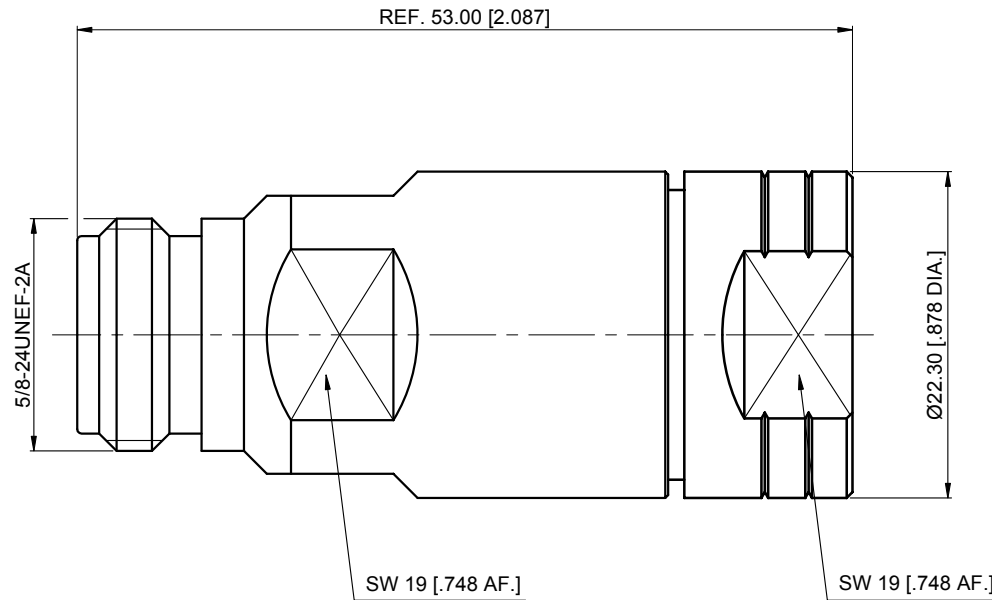

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS [INCHES].
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE:

.XX	±0.13 [.005"]
.X	±0.20 [.008"]
X	±0.50 [.019"]

ANGULAR TOLERANCES ARE: ALL=±1°

DO NOT SCALE DRAWING

PROJECTION:

DRAWN:	L. Ma	11/01/2013
CHECKED:	J. Zhu	11/01/2013
APPROVED:	M. Dong	11/01/2013

TITLE:
**N Straight Female
Clamp for 1/2" RF Cable**

CMPPTER[®]
Cmptter Electronics Co., Ltd. www.cmptter.com

PART No.:
50-02-4M26-027

SIZE: A4	SCALE: 2:1	SHEET: 1/1	REV: D
-------------	---------------	---------------	-----------

NOTES:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.