

TECHNICAL DATA

Electrical

Impedance 50 Ω
 Frequency range 0~3 GHz
 Withstanding voltage 2500 V
 Insulation resistance ≥5000MΩ

Mechanical & Environmental

Durability (matings) >500
 Temperature range -65 °C ~ +165 °C
 RoHS Compliant Yes


Material & Finish

Bodies Brass, Albaloy-plated
 Pin Contact Phosphor Bronze, Silver-plated
 Coupling Nut Brass, Nickel-plated
 Gasket Silicone Rubber
 Insulator PTFE

Interface Standards

N IEC-60169

REVISIONS				
REV	DESCRIPTION OF REVISION	ECN No.	DATE	APPROVED
A	INITIAL RELEASE	---	11/04/2010	M. Dong
B	DIMENSIONS CHANGED	---	11/07/2012	M. Dong
C	DIMENSIONS CHANGED	---	04/16/2013	M. Dong

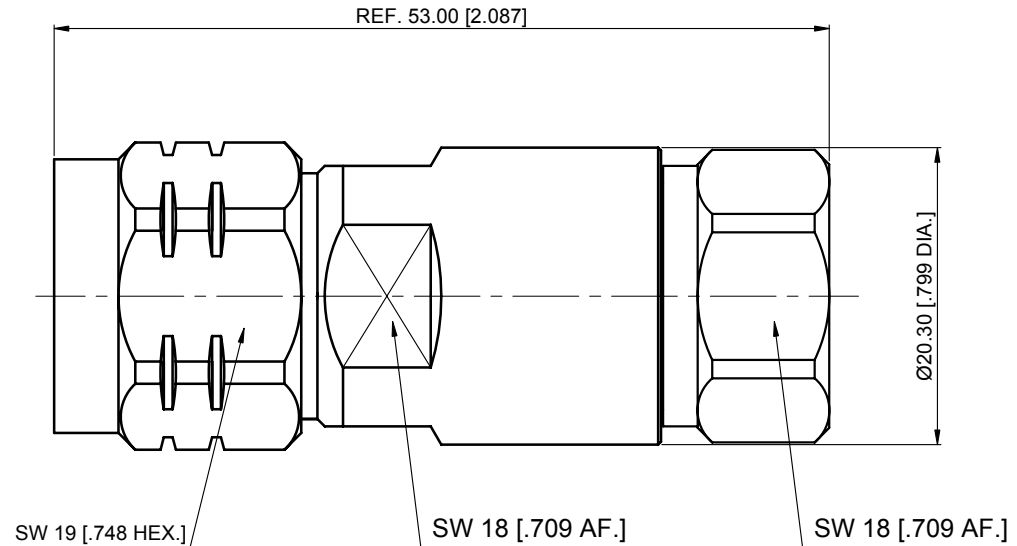

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS [INCHES]. UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"]	
ANGULAR TOLERANCES ARE: ALL±1°	
DO NOT SCALE DRAWING	
PROJECTION:	

DRAWN:	L. Ma	04/16/2013
CHECKED:	J. Zhu	04/16/2013
APPROVED:	M. Dong	04/16/2013

TITLE:
**N Straight Male Clamp for
 1/2" Super Flexible Cable**

CMPPTER [®]			
Cmptter Electronics Co., Ltd. www.cmptter.com			
PART No.: 50-03-4M29-085			
SIZE: A4	SCALE: 2:1	SHEET: 1/1	REV: C

- NOTES:
- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 - UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.