

TECHNICAL DATA

Electrical

Impedance	50 Ω
Frequency range	0~3 GHz
Withstanding voltage	750V
Insulation resistance	$\geq 5000M\Omega$

Mechanical & Environmental

Durability (matings)	>500
Temperature range	-55 °C ~ +165 °C
RoHS Compliant	Yes



Material & Finish

Body	Brass, Gold-plated
Pin Contact	Brass, Gold-plated
Insulator	PTFE

Interface Standards

SMB	IEC-60169
-----	-----------

REVISIONS				
REV	DESCRIPTION OF REVISION	ECN No.	DATE	APPROVED
A	INITIAL RELEASE	—	08/27/2018	M. Dong

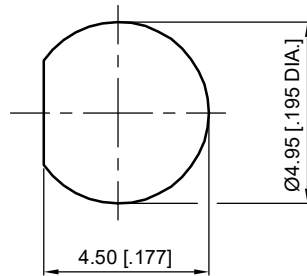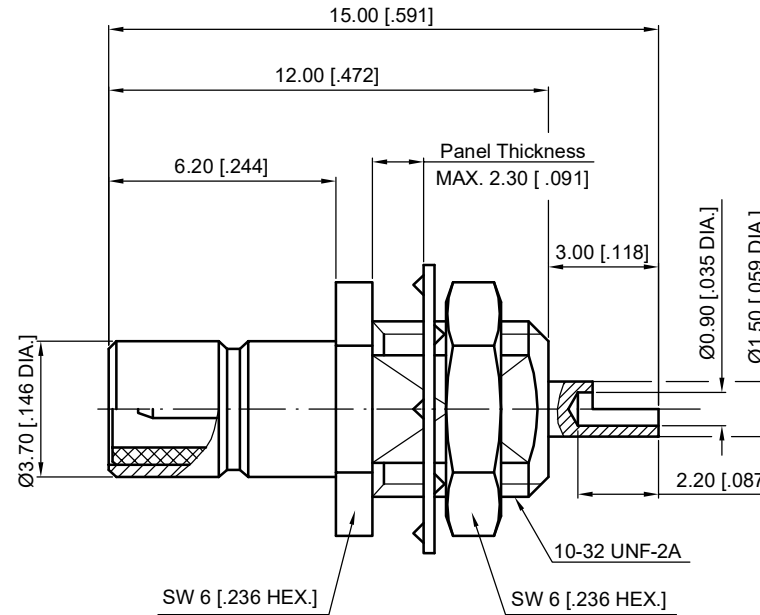

Recommended Mounting Holes

NOTES:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS [INCHES].
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE:

XX	± 0.13 [.005"]
X	± 0.20 [.008"]
X	± 0.50 [.019"]

ANGULAR TOLERANCES ARE: ALL= $\pm 1^\circ$

DO NOT SCALE DRAWING

PROJECTION:



DRAWN:	L. Ma	08/27/2018
CHECKED:	J. Zhu	08/27/2018
APPROVED:	M. Dong	08/27/2018

TITLE:

SMB Straight Front Mount
Bulkhead Jack

CMPPTER[®]

Cmppter Electronics Co., Ltd. www.cmppter.com

PART No.:

79-02-9A1-079

SIZE:	SCALE:	SHEET:	REV:
A4	5:1	1/1	A