

TECHNICAL DATA

Electrical

Impedance	50 Ω
Frequency range	0~6 GHz
Voltage Rating	500 Vrms
Insulation resistance	$\geq 5000M\Omega$

Mechanical & Environmental




Durability (matings)	>500
Temperature range	-55 °C ~ +165 °C
RoHS Compliant	Yes

Material & Finish

Body	Brass, Nickel-plated
Pin Contact	Phosphor Bronze, Gold-plated
Insulator	PTFE
Gasket	Silicone Rubber

Interface Standards

TNC	IEC-60169
-----	-----------

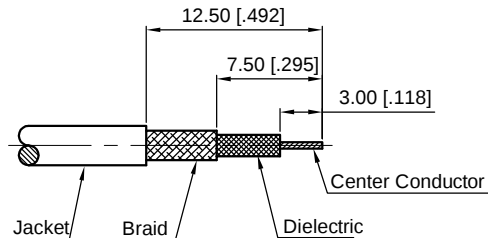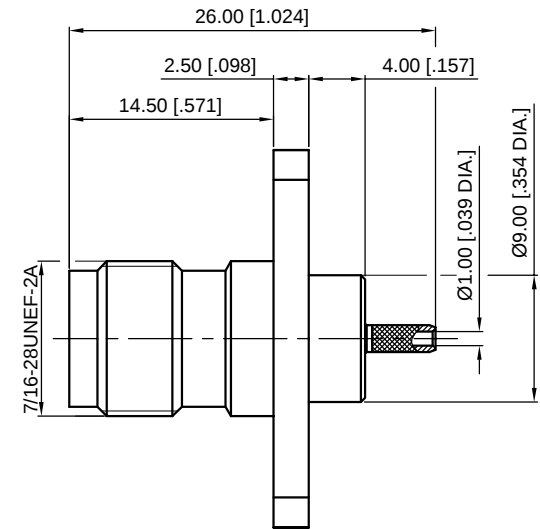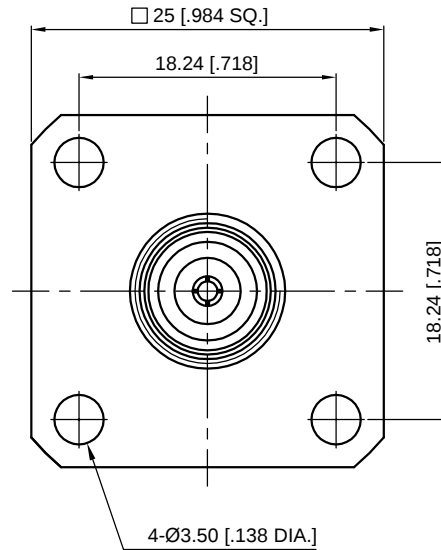

Cable Stripping Dimensions

NOTES:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS [INCHES].
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE:

.XX	± 0.13 [0.005"]
X	± 0.20 [0.008"]
X	± 0.50 [0.019"]

ANGULAR TOLERANCES ARE: ALL $\pm 1^\circ$

DO NOT SCALE DRAWING

PROJECTION:



DRAWN:	L. Ma	10/30/2018
CHECKED:	J. Zhu	10/30/2018
APPROVED:	M. Dong	10/30/2018

TITLE:

TNC Straight 4 Hole Flange
Female Crimp for RG178 Cable

CMPPTER®
Cmptter Electronics Co., Ltd. www.cmptter.com

PART No.:

80-02-4F12-074

SIZE:	SCALE:	SHEET:	REV:
A4	2:1	1/1	A